



# Refrigerator

## PRODUCT MODEL NUMBERS


TT14DKXS	T6TXNFW
TT16DKXS	T8RXNGFW
TT18TKXS	T8TXNGFW
T4TXNFW	T8TXNFW

**Electrical:** A 115-volt, 60-Hz, AC-only, 15- or 20-ampere fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**Water:** A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa). If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


## PRODUCT DIMENSIONS

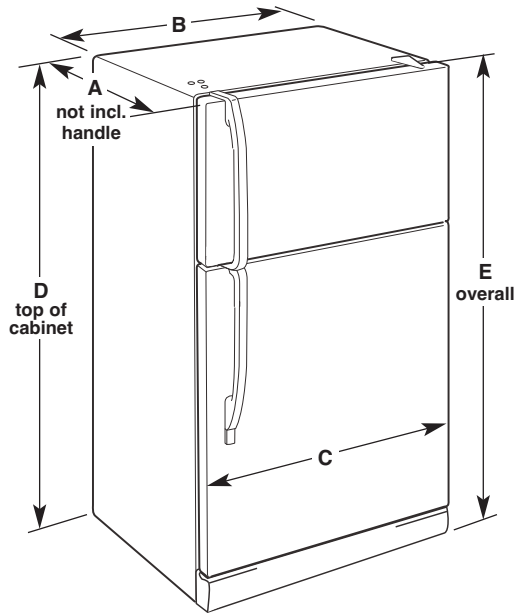

Dimensions "D" and "E" include rollers extended 3/4".

Model	Depth "A"	Cab. Width "B"	Door Width "C"	Cab. Height "D"	Overall Height "E"
14 cu.ft. TT14DKXS T4TXNFW	29-3/4" (75.6 cm)	28" (71.1 cm)	28" (71.1 cm)	62-1/8" (157.8 cm)	62-3/4" (159.4 cm)
16 cu.ft. TT16DKXS	31-1/8" (79.1 cm)	28" (71.1 cm)	28" (71.1 cm)	65-1/4" (165.7 cm)	65-3/4" (167 cm)
16 cu.ft. T6TXNFW	30-7/8" (78.4 cm)	28" (71.1 cm)	28" (71.1 cm)	65-1/4" (165.7 cm)	65-3/4" (167 cm)
18 cu.ft. TT18TKXS	31-1/8" (79.1 cm)	28" (71.1 cm)	28" (71.1 cm)	67-3/8" (171.1 cm)	67-7/8" (172.4 cm)
18 cu.ft. T8RXNGFW T8TXNGFW T8TXNFW	30-7/8" (78.4 cm)	28" (71.1 cm)	28" (71.1 cm)	67-3/8" (171.1 cm)	67-7/8" (172.4 cm)

## LOCATION REQUIREMENTS

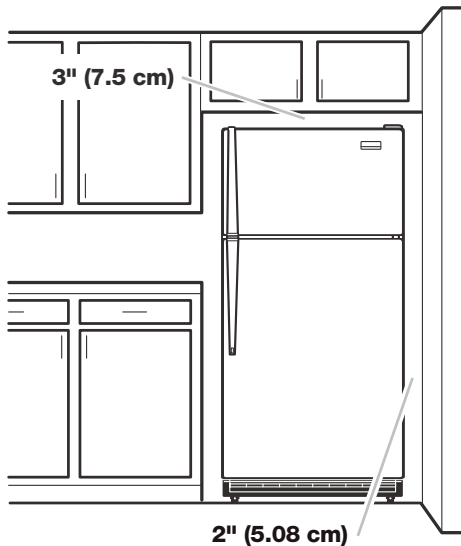

To ensure proper ventilation for your refrigerator, allow for a 1/2" (12.7 mm) space on each side. Allow 3" (7.5 cm) of space between overhead cabinets and refrigerator top. Allow at least 1" (25.4 mm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5.08 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

**NOTE:** It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source. Do not install in a location where the temperature will fall below 55° (13°C).